

RADIO TRANSMITTER UNIT FOR VIDEO-PROJECTOR:

1. DESCRIPTION

The RTU, once connected to a video-projector 12v dc output, operates the screen downwards together with the projector switching on, thus the projector switching off sends the screen back up.

2. COMPATIBILITY

This unit can only operate when matched with the proper receiver included in the kit.

3. CONNECTION


- connect the plug to the 12v dc output of the projector
- connect the receiver to the motor
- check the proper downwards of the screen by switching the button on the transmitter
- if the screen should not proper operate, invert the motor core cables in the clips.
- - *as soon as the VP switches on, the screen moves down, as soon as it switches off the screen closes*

4. GENERAL RULES:

Once the screen has moved down, wait at least 2min. before closing it

IMPORTANT:

- The 12v dc output has to be uninterrupted, some kind of projector needs to be set.
- The RTU has been set by the factory, each kit has a single code: do not set any part of the kit by yourself.

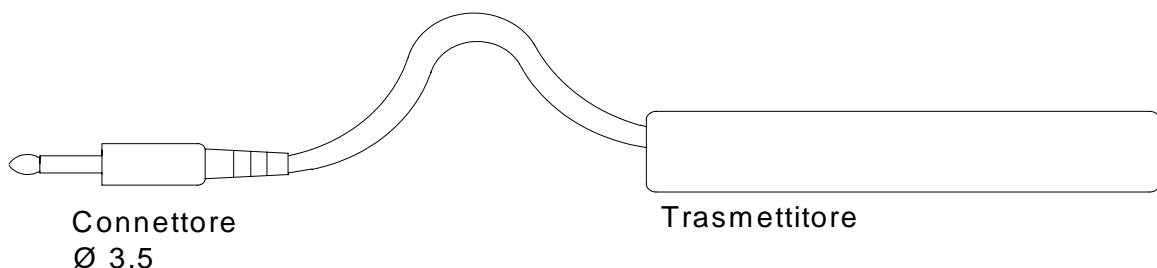

ISTRUZIONI TRASMITTENTE RADIO PER VIDEO PROIETTORE

1. Descrizione

La trasmittente radio collegata all'uscita a 12Volt cc del video proiettore, comanda l'apertura dello screen all'accensione del video proiettore e la chiusura allo spegnimento.

2. Compatibilità

La trasmittente è compatibile esclusivamente con la ricevente a cui è abbinata nel kit di vendita.

3. Principio di funzionamento

Collegare lo spinotto all'uscita a 12Volt cc del video proiettore, collegare la ricevente al motore controllando che premendo il tasto di apertura, della trasmittente "portatile" in dotazione del Kit, lo screen si apra. Se non si apre invertire i fili del motore nei morsetti AP e CH del ricevitore. All'accensione del video proiettore lo screen si apre, al suo spegnimento lo screen si chiude.

4. Regole generali.

Dopo l'apertura (accensione del proiettore) attendere almeno 2 minuti prima di spegnerlo.

Attenzione i 12 Volt in uscita dal proiettore devono essere continui, in alcuni proiettori tale uscita va programmata.

Non programmare il ricevitore, il kit ricevitore trasmittente portatile e trasmittente proiettore viene consegnato programmato dalla fabbrica, ogni kit a un suo codice personale.

